



PROFILFLEX

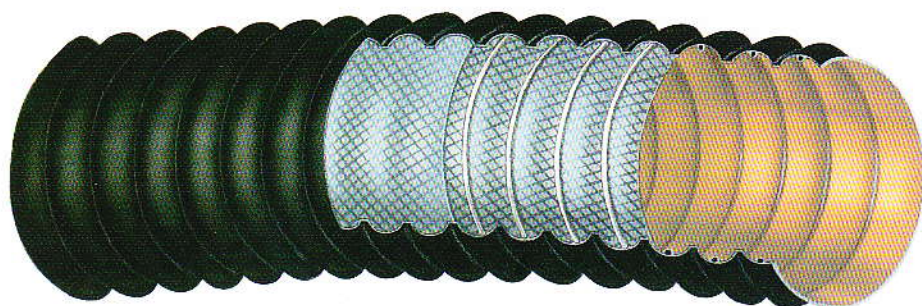

gumex
... pružné partnerství

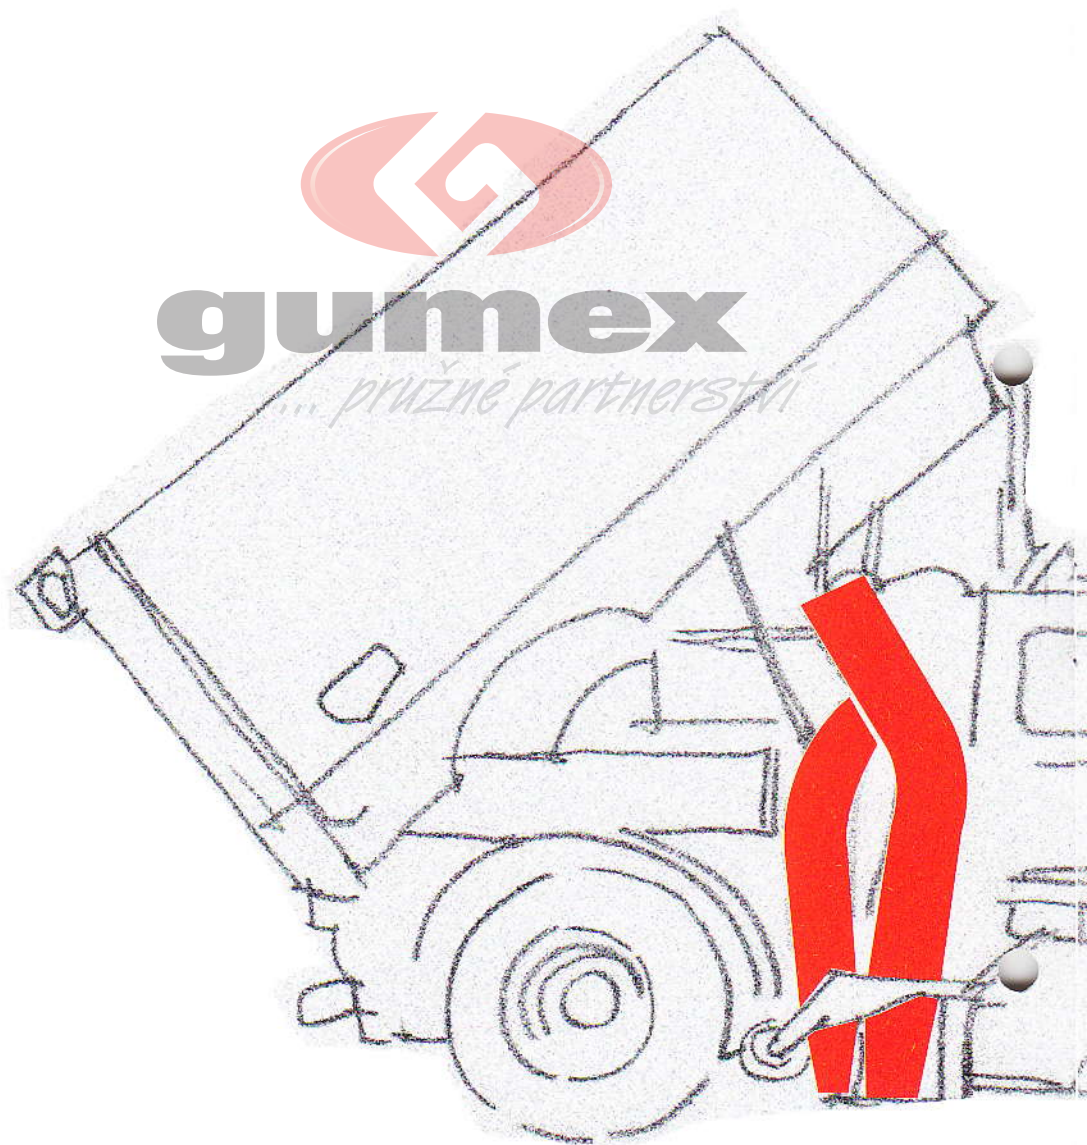

APPLICATION

- suction and light delivery hose of dry abrasive materials.
- flexible connection used in sweeping machines
- connection between fixed pipes where high flexibility is required

CONSTRUCTION

TUBE:

- NR-based rubber, beige, corrugated, abrasion resistant, moulded on a profile

REINFORCEMENT

- plies of synthetic cord and steel helix wire

COVER:

- NR-based rubber, black, corrugated, abrasion, weather and ozone resistant, cloth finished

TEMPERATURE RANGE:

- from -30°C up to + 60°C

SAFETY FACTOR:

- ≥ 3 times working pressure

FITTINGS:

- band-it, standard collars or other systems

I.D. mm	O.D. (on corrugation) mm	BENDING RADIUS MIN.at 20°C mm	WORKING PRESSURE bar	VACUUM at 20°C mm/Hg	THEORETICAL WEIGHT Kg/m	MAXIMUM LENGTH m
200	250	100	0,3	300	6,30	6
250	300	125	0,3	300	7,50	6
280	330	140	0,2	300	8,70	6
300	350	150	0,2	300	9,30	6
350	400	180	0,1	300	10,60	6
400	450	200	0,1	300	12,00	6

- tolerances on the internal diameter according to ISO 1307/1992
- supplied only in fixed lengths with cuffs at both ends.
- other sizes can be supplied on demand

gumex

... pružné partnerství

