



VAT NR.: 11211084-2-12
EU VAT NR.: HU11211084
BANK: OTP NYRT.
EUR ACC. NR.: 11763419-12404889
HUF ACC. NR.: 11741024-29900459
IBAN NR.: HU43 1176 3419 1240 4889 0000 0000
SWIFT NR.: OTPVHUHB
REG. NR.: 12-09-002809

H-3060 Pásztó,
Mária Tanya 2.
Tel.: +36 32 563 040
Fax: +36 32 563 041
Mail: sickft@sickft.hu
Web: <http://www.sickft.hu>

SILICONE/POLYESTER 'AUTOMOTIVE' AND 'INDUSTRIAL' HOSES


Unless otherwise stated, our standard Reinforced Silicone Rubber Hoses have 3 plies of Polyester reinforcement – this applies to all hoses up to an Internal Diameter of 50mm. For larger diameter hoses we use 4 plies of the same reinforcement to provide better pressure resistance. Our reinforced silicone hoses undergo extensive physical, chemical, and dynamic testing to perfectly match industry needs.

- Temperature range: -70°F to +350°F (-56°C to +177°C)
- Meets or Exceeds requirements SAEJ20 R4 Class A
- Available with the option of Fluorosilicone Lining for added oil/ acids/ fuel resistance, or FKM/ Viton® lining for diesel combustion by-products/ exhaust gas recycle

APPLICATIONS: Coolant, Air, and Water transfer. Also suitable for polar liquids, such as polyhydric alcohols, low-molecular ketones. Silicone rubber has good resistance to aqueous solutions of weak acids, alkalis or salts, low concentrated coolants like glycols. Silicone Rubber has good resistance to Air, Ozone and UV radiation.

NOT SUITABLE FOR: non-polar liquids such as hydrocarbons, mineral oils and greases. Strongly attacked by concentrated acids and alkalis, particularly by oxidizing acids such as sulfuric or nitric acid. Also, Silicone Rubber is not suitable coolants containing high-concentration of ethyl-hexanoic acids and sebacate, or coolants with very high pH levels.

Available in a host of colours (specify the RAL code # in your enquiry as simple as that)

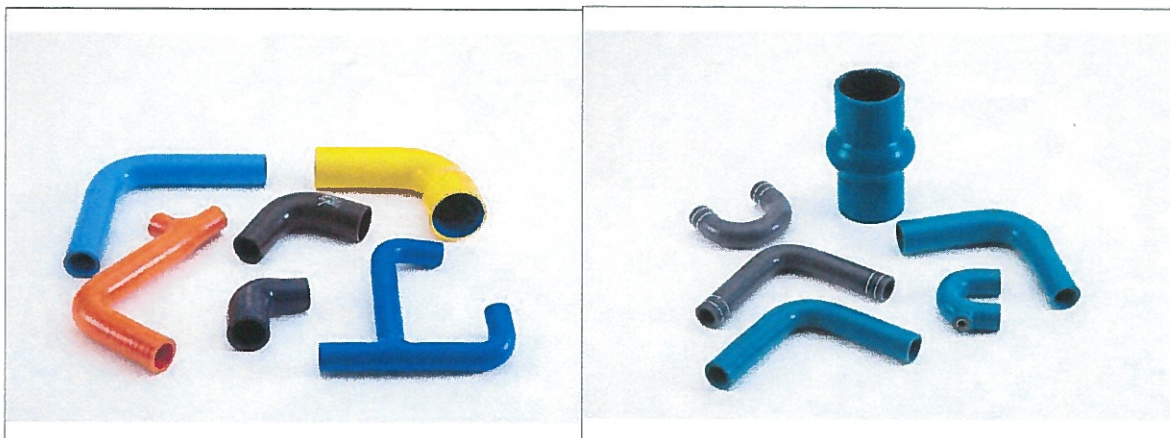



VAT NR.: 11211084-2-12
 EU VAT NR.: HU11211084
 BANK: OTP NYRT.
 EUR ACC. NR.: 11763419-12404889
 HUF ACC. NR.: 11741024-29900459
 IBAN NR.: HU43 1176 3419 1240 4889 0000 0000
 SWIFT NR.: OTPVHUHB
 REG. NR.: 12-09-002809

H-3060 Pásztó,
 Mária Tanya 2.
 Tel.: +36 32 563 040
 Fax: +36 32 563 041
 Mail: sickft@sickft.hu
 Web: http://www.sickft.hu

Burst Pressures of typical Silicone/Polyester Hoses:

<u>ID (mm)</u>	<u>Burst Pressure (Bar)</u>	<u>ID (mm)</u>	<u>Burst Pressure (Bar)</u>
6.00	41.2	38.00	13.9
8.00	38.6	45.00	11.2
12.00	28.5	50.80	10.2
15.00	22.3	55.00	9.5
18.00	21.1	63.00	7.9
22.00	17.8	70.00	6.8
25.00	16.7	75.00	6.1
28.00	16.1	89.00	5.5
32.00	14.7	102.00	5.0

*Vacuum Pressures also available on demand

Other Physical Properties:

Shore Hardness (Shore A)	70 +/-5
Tensile Strength (MPa)	7.08
Elongation at Break (%)	258
Compression Set (%) 70 hours at 125°C	21.3

Change in Properties following Heat-Ageing at 175°C for 70 hours.

Change in Hardness (Shore A)	+3
% Change in Tensile Strength	-11.68
% Change in Elongation at Break	-22.76

Note: Hoses with Improved Results can be supplied (for example for higher temperature resistance) on customers' specific demand.