


PLUTONE PO




Tubo in speciale lega PVC/NBR color nero con striscia identificativa di color marrone, rinforzato con spirale in acciaio armonico ed inserzione tessile ad alta tenacità. Resistente all'abrasione, invecchiamento, agenti atmosferici e ozono. il tubo può essere reso conduttivo ($R < 10^2$ Ohm/m) mettendo a terra la spirale.

• Industria chimica: per aspirazione e mandata di olii minerali, lubrificanti, carburanti grezzi (nafta, gasolio) e come linea di ritorno sui circuiti idraulici.

Inside and outside black, with a brown stripe, its inner layer is made with a special blend of PVC/NBR.

The structure is reinforced both by a harmonic steel wire and a polyester yarn. Very flexible, resistant to abrasion, ageing, atmospheric agents and ozone. it can be made conductive ($R < 10^2$ Ohm/m) by earthing the spiral

• *For suction and delivery of mineral oils, lubricants, crude fuel (naphta, diesel oil) and as a return line in hydraulic systems.*

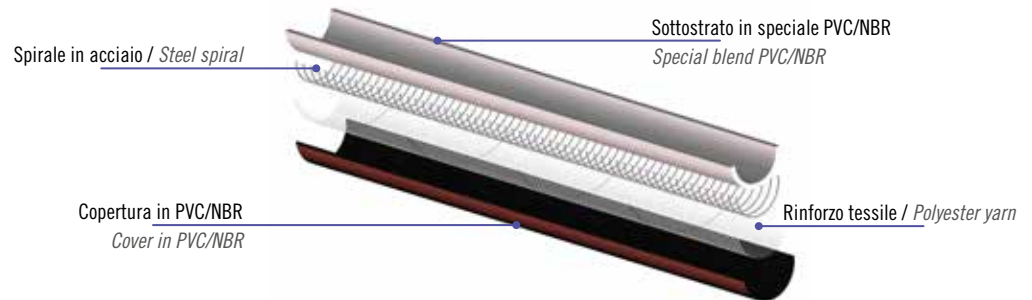

Scheda tecnica / Technical data

Codice	Ø Int.	Ø Est.	Peso	P.E.	P.S.	Depr.	R. Curvatura	Lg. Rotolo	Vol.
Code	Ins. Ø	Out. Ø	Weight	WP	BP	Vac.	Bending	Coil lgth.	Vol.
	mm	mm	g/m	bar	bar	m H ₂ O	mm	m	m ³
PH 01 020.0 029.0	20	29	470	14	42	10	60	60	0,106
PH 01 025.0 035.0	25	35	650	12	36	10	80	60	0,146
PH 01 032.0 043.0	32*	43	885	11	33	9	100	60	0,214
PH 01 035.0 046.0	35*	46	955	10	30	9	110	60	0,225
PH 01 038.0 049.0	38*	49	1025	10	30	9	110	40	0,232
PH 01 040.0 053.0	40	53	1275	10	30	9	120	40	0,243
PH 01 045.0 058.0	45*	58	1500	9	27	8	140	40	0,285
PH 01 050.0 063.0	50	63	1645	8	24	8	150	40	0,341
PH 01 060.0 074.0	60*	74	2070	7	21	8	180	30	0,363
PH 01 063.0 077.0	63*	77	2165	7	21	8	190	30	0,379
PH 01 076.0 091.0	76*	91	2705	6	18	7	230	30	0,604
PH 01 080.0 095.0	80*	95	2805	6	18	7	240	20	0,498
PH 01 090.0 106.0	90*	106	3415	5	15	7	270	20	0,760
PH 01 102.0 118.0	102*	118	3830	4	12	7	310	20	0,801

*Disponibile su richiesta, per quantitativi da concordare con l'ufficio vendite / *Available on request, contact our sales office for more info and quantities

I dati tecnici qui riportati sono stati misurati a 23°C e al 50% di umidità / The technical data here reported were measured at 23°C with 50% humidity