


SUPERFLEXTRACT

PVC VACUUM DUCTING MEDIUM WEIGHT

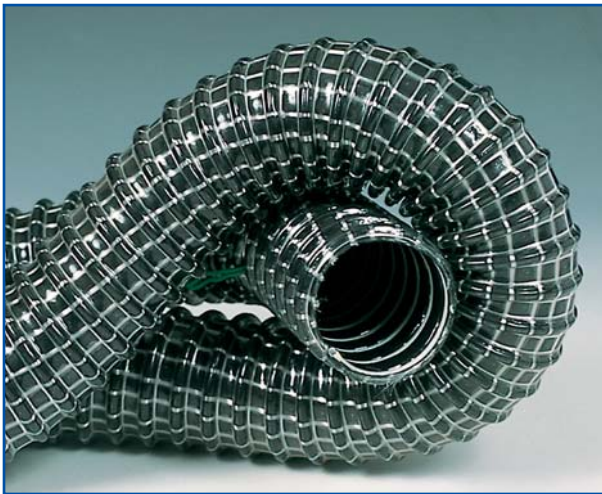

CONSTRUCTION:

Plasticised PVC with encapsulated axial and helical re-inforcing yarns supported by a PVC covered spring steel helix.

COLOUR:

Black with white yarns.

STANDARD LENGTH:

15 Metres.

TEMPERATURE RANGE:

-5°C to +80°C in a 20°C ambient.

APPLICATIONS:

Air Handling, dust and fume extraction. Particularly suitable for domestic and industrial vacuum cleaners.

PROPERTIES:

Flexible, smooth bore ducting. Robust and easy to handle with good abrasion resistance.

OPTIONS:

Screw type cuffed ends.
Colours.

Technical Data

Diameter mm	Weight Kg/m	Bend Radius mm	Working Pressure Bar	Working Vacuum Bar
25	0.22	25	1.05	0.91
32	0.27	32	1.00	0.91
38	0.37	38	0.95	0.80
51	0.49	51	0.90	0.59
64	0.61	64	0.80	0.43
76	0.85	76	0.75	0.40

Technical data at + 20°C.

Other diameters available upon request.