




F21 | **PVCEXCON 2F/12 W26 U0/V08 FA** | **KB2WH2601**

TECHNICAL INFORMATION

	IMPERIAL	METRIC
Max Production Width	118.11in	3000mm
Total Thickness	0.1in	2.6mm
Mass	0.62lb/ft ²	3kg/m ²
Tensile force at 1% elongation (static)	68lbf/in Internal Method - ref. ISO 21181	12N/mm
Working Temp.	+14/+158F ^o	-10/+70C ^o
Flexion (A)	1.97in 50mm	
Counter Flexion (B)	2.36in 60mm	


BEST USED FOR

GENERAL CHARACTERISTICS
 2 ply white PVC Food approved, flexible weft

SPECIAL CHARACTERISTICS

- ✓ **Food Approved, FDA compliance**
acc.to 21 CFR parts 170-19
- ✓ **Food Approved, EU compliance**
(EC) No. 1935/2004 & (EU) No. 10/2011
- ✓ **Oil & Fat Resistant**

BELT CONSTRUCTION INFORMATION

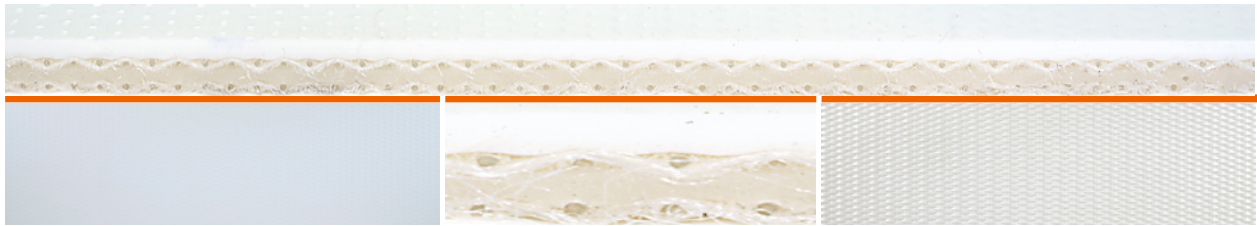

TOP SIDE (Carrying)		TENSION MEMBER	BOTTOM SIDE (Pulley)		
Material	PVC	Interply	PVC	Material	Fabric
Color	White (W)	Weft	Flexible (F)	Color	Fabric (FA)
Thickness	0.03in 0.8mm	Plies	2	Thickness	0in 0mm
Hardness ISO 868	72 Shore A	Fabric	Flexible (F)	Hardness ISO 868	-
Surface	Smooth - Shiny (L)			Surface	PU Impregnated (U0)



F21



PVCEXCON 2F/12 W26 U0/V08 FA

KB2WH2601

SPLICE INSTRUCTIONS (Preferred)



STRAIGHT FINGERS (SF)


	WATER COOL	AIR COOL
 <p>Temperature: 180 C° 180 C° 356 F° 356 F°</p> <p>Pressure: 29 PSI 7.3 PSI 2 Bars 0.5 Bars</p>		
<ul style="list-style-type: none"> • Release Paper • Foil • Belt (Conveying Side Up) • Release Paper 		
 <p>Temperature: 180 C° 180 C° 356 F° 356 F°</p> <p>Pressure: 29 PSI 7.3 PSI 2 Bars 0.5 Bars</p> <p>Dwell Time: 0 Min 2 Min</p> <p>Note: Foil is optional for air cooled.</p>		

MECHANICAL JOINING METHOD

	Recessed Lacing	YES
	Hidden Lacing	YES
	Staple Lacing	RS62
	Plastic Spiral Lacing	NO
	Spiral Finger	YES
	APF Fasteners	APF-150
	Alligator	7
	Clipper Lacing	25LP, 30P, UX-1 SP, UCM36, 36, 1 SP, UX-1LL SP

FRICTION COEFFICIENT (Bottom Side)

Stainless Steel, BA (Brilliant Surface)	0.20
Stainless Steel, 2B (Half-Brilliant Surface)	0.20
Stainless Steel, 2D (Hot-Laminated Surface)	0.25
Rolled Steel Plate	0.20
Plastic Sheet Brilliant Surface)	0.20

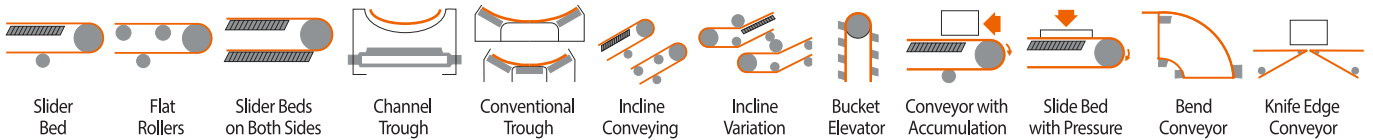

● Applicable ◐ Limited Use ○ Not Applicable

WARNING: This product can expose you to chemicals including DINP, which is known to the State of California to cause cancer or birth defects or other reproductive harm. For more information visit www.P65WARNINGS.ca.gov

*Because of continuous development above data is subjected to change without prior notice by Sampla. This data replaces that included in previous publications. Sampla excludes any liability for the incorrect use of the above stated information.

RELEASED 01/01/2019