

# Metallic Systems

## S Conduit



### Technical Characteristics

Conforms to BSI Kitemark KM-35161  
Low voltage directive  
Inherent Low Fire Hazard

Approvals and Standards



Degree of mechanical protection

Very high flexibility & fatigue life

Degree of protection

IP40 - with type S fittings

UV protection

Very High

Finish

Natural material

Application

Indoors / Outdoors - light industrial, buildings

Normal operating temperature range

| Application | Min Temp | Max Temp |
|-------------|----------|----------|
| Static      | - 50°C   | +300°C   |
| Dynamic     | - 45°C   | +250 °C  |

For use with - Fitting range

[Adaptasteel](#) - Type [A](#), [B](#), [E](#), and [F](#)

Fire performance

**Test Standard**

**Performance Rating**

|            |      |
|------------|------|
| EN45545    | ILFH |
| NFF16-101  | ILFH |
| LUL-1085   | ILFH |
| BS6855     | ILFH |
| DIN 5510-2 | ILFH |

(See Fire testing [data](#) for fire performance overview)



Testing data

Click or See pages [3](#) & [4](#)

Type of material

Galvanised steel

Image



# Metallic Systems


## S Conduit



### Technical & Dimensional Data

|                                |       |          |          |          |          |       |        |        |      |        |
|--------------------------------|-------|----------|----------|----------|----------|-------|--------|--------|------|--------|
| Conduit size metric (mm)       | 10    | 12       | 16       | 20       | 25       | 32    | 40     | 50     | 63   | 75     |
| Conduit size US trade (inches) | 1/4"  | 5/16"    | 3/8"     | 1/2"     | 3/4"     | 1"    | 1 1/4" | 1 1/2" | 2"   | 2 1/2" |
| Part code                      | S     | S        | S        | S        | S        | S     | S      | S      | S    | S      |
| Coil length (m)                | 25/50 | 10/25/50 | 10/25/50 | 10/25/50 | 10/25/50 | 10/25 | 10/25  | 10/25  | 10   | 10     |
| A - Outside diameter (mm)      | 9.0   | 13.0     | 16.0     | 20.5     | 25.0     | 32.0  | 42.5   | 53.0   | 62.5 | 77.0   |
| B - Inside diameter (mm)       | 6.8   | 10.3     | 13.0     | 16.9     | 21.4     | 28.1  | 37.7   | 48.4   | 57.5 | 70.0   |
| C - Static bend radius (mm)    | 25    | 30       | 35       | 45       | 55       | 60    | 80     | 90     | 115  | 150    |
| Average weight (KG/100m)       | 10    | 11.6     | 18.2     | 23.6     | 28       | 46    | 74.9   | 93.9   | -    | 152.5  |

*For ordering code add coil length to part code - e.g S25/25M*

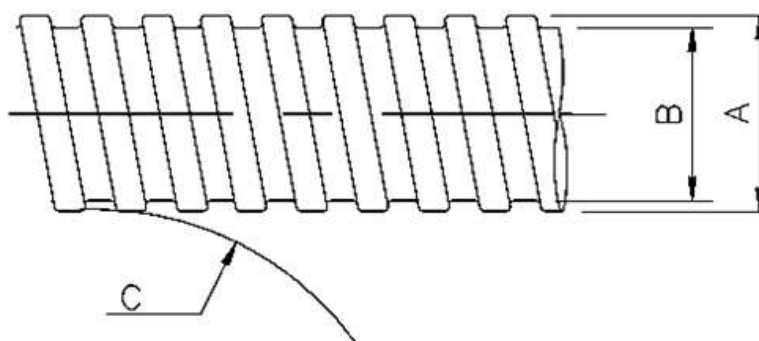

# Metallic Systems

## S Conduit



### BS EN 61386 Clarification

|   | Fitting | Compression | Impact | Min temp | Max temp | bending | electrical | IP solids | IP water | Corrosion | Tensile | Non-flame Propogating | Suspended load |
|---|---------|-------------|--------|----------|----------|---------|------------|-----------|----------|-----------|---------|-----------------------|----------------|
| S | S       | 4           | 4      | 5        | 6        | 4       | 0          | 4         | 0        | 1         | 4       | 1                     | 5              |

### Mechanical Properties

| Test Type                    | Methods / Standards | Requirements                        | Value  |
|------------------------------|---------------------|-------------------------------------|--------|
| Crush Strength @ 23°C        | IEC61386-1          | <25% crush >90% recovery            | >1500N |
| Crush Strength @ 23 °C       | AFX norm C1989      | 10% Crush, Instantaneous Value      | 2200N  |
| Impact Strength @ 23 °C      | IEC61386-1          | No Cracks <20% deformation          | >20J   |
| Impact Strength @-25 °C      | IEC61386-1          | No Cracks. <20% deformation         | >6J    |
| Tensile Strength             | IEC61386-1          | With S Type Fitting                 | >1000N |
| Tensile Strength             | AFX norm T1987      | Ultimate pull-out of S-Type Fitting | 1450N  |
| Dynamic Bend radius @ -45 °C | IEC61386-23         | 5000 cycles minimum                 | 4xOD   |

### Thermal Properties

| Test Type           | Methods / Standards | Requirements        | Value |
|---------------------|---------------------|---------------------|-------|
| Minimum Temperature | IEC61386-23         | Dynamic 5000 cycles | -45°C |
| Maximum Temperature | IEC61386-23         | Dynamic 5000 cycles | 250°C |
| Minimum Static      |                     | Permanent Use       | -50°C |
| Maximum Static      |                     | Permanent Use       | 300°C |

### Chemical Resistance Chart

**Key:**

Suitable :



Limited Suitability :



Unsuitable :



Not Tested :



|                      |                         |                        |                       |
|----------------------|-------------------------|------------------------|-----------------------|
| Astm No.1            | Diesel oil              | Methyl Bromide         | Sulphur Dioxide (Gas) |
| Astm No.2            | Diethylamine            | MEK                    | Sulphuric Acid (10%)  |
| Astm No.3            | Ethanol                 | Nitric Acid (10%)      | Sulphuric Acid (70%)  |
| Acetic Acid (10%)    | Ether                   | Nitric Acid (70%)      | Toluene               |
| Acetone              | Ethylamine              | Oxalic Acid            | Transformer Oil       |
| Aluminium Chloride   | Ethylene Glycol         | Ozone (Gas)            | 1,1,1-Trichloroethane |
| Aniline              | Ethyl Ethanoate         | Paraffin oil           | Trichloroethylene     |
| Benzaldehyde         | Freon 32                | Petrol                 | Turpentine            |
| Benzene              | Hydrochloric Acid (10%) | Phenol                 | Vegetable Oil         |
| Carbon tetrachloride | Hydrochloric Acid (36%) | Sea Water              | Vinyl Acetate         |
| Chlorine water       | Hydrogen Peroxide (35%) | Silver Nitrate         | Water                 |
| Chloroform           | Hydrogen Peroxide (87%) | Skydrol                | White Spirit          |
| Citric Acid          | Lactic Acid             | Sodium Chloride        | Zinc Chloride         |
| Copper Sulphate      | Lubricating oil         | Sodium Hydroxide (10%) |                       |
| Cresol               | Methanol                | Sodium Hydroxide (60%) |                       |

The information above is given as a guide only and is based on published technical data and experience. The chemical resistance of the above products is dependant on factors such as chemical exposure, concentration of the chemical and temperature. The above chemicals are valid for a temperature of 23°C. Use of the above table is at the users own discretion and risk. Those using it must satisfy themselves that their application presents no health and safety risks. The end user should assess compatibility with their application and contact Thomas & Betts for further information.

ADHERENCE TO THE CURRENT WIRING REGULATIONS BS7671 OR NEC WIRING REGULATIONS (FOR USA) IS STRONGLY ADVISED.  
 MINIMUM BEND RADIUS FOR FLEXING IS DEPENDANT UPON MINIMUM TEMPERATURE, BENDING FREQUENCY AND CHEMICAL ENVIRONMENT.

# Metallic Systems

## S Conduit



### Flammability

| Test Type        | Method / Standard | Requirement                          | Result | Unit      |
|------------------|-------------------|--------------------------------------|--------|-----------|
| Oxygen Index     | ISO 4589-2        | % Oxygen to support combustion       | ILFH   | %         |
| Glow Wire Rating | IEC 60695         | No Ignition to Extinguish with 30s   | ILFH   | °C        |
| Flammability     | UL94              | Vertical (V0, V2) or Horizontal (HB) | ILFH   |           |
| Flammability     | IEC 61386-1       | 1Kw Burner @ 45°                     | ILFH   | Pass/Fail |
| FTI              | ISO 4589-3        |                                      | ILFH   |           |





### Smoke

| Test Type     | Method / Standard | Requirement                       | Result | Unit |
|---------------|-------------------|-----------------------------------|--------|------|
| Smoke Density | ATS1000           | In flaming mode <100 @ 4 mins     | ILFH   |      |
| Smoke Density | ATS1000           | In non flaming mode <100 @ 4 mins | ILFH   |      |
| Smoke Density | BS6853            | A <0.02                           | ILFH   |      |
| Smoke Density | ASTM E-662        | Flaming mode Ds Max               | ILFH   |      |
| Smoke Density | ISO - 5659-2      | Ds Max                            | ILFH   |      |

### Toxicity

| Test Type        | Method / Standard | Requirement        | Result | Unit   |
|------------------|-------------------|--------------------|--------|--------|
| Halogen Free     | LUL               | <0.5%              | ILFH   | Yes/No |
| Phosphorous Free | LUL               | <0.5%              | ILFH   | Yes/No |
| Sulphur Free     | LUL               | <0.5%              | ILFH   | Yes/No |
| NFX 70-100       | NFX70 - 100 1 / 2 | CIT <sub>NLP</sub> | ILFH   | N/A    |

### Fire Performance Overview

| Property                             | Low Fire Hazard                                                                     | Enhanced Low Fire Hazard                                                            | Super Low Fire Hazard                                                                 | Inherent Low Fire Hazard                                                              |
|--------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                                      |  |  |  |  |
| <b>Property</b>                      | LFH                                                                                 | EFLH                                                                                | SLFH                                                                                  | ILFH                                                                                  |
| Oxygen Index ISO4589                 | 32% ≥ OI ≥ 28%                                                                      | OI ≥ 32%                                                                            | OI ≥ 32%                                                                              | Inherent Low Fire Hazard i.e                                                          |
| BS6853 Smoke Density 3m <sup>3</sup> | 0.02 ≤ A <sub>s</sub> ≤ 0.03                                                        | 0.0005 ± A <sub>s</sub> ≤ 0.02                                                      | A <sub>s</sub> ≤ 0.005                                                                | Type , S, SS                                                                          |
| Zero Halogen                         | ✓                                                                                   | ✓                                                                                   | ✓                                                                                     | Metallic Conduit & Fittings                                                           |
| Zero Phosphorus                      | ✓                                                                                   | ✓                                                                                   | ✓                                                                                     |                                                                                       |
| Zero Sulphur                         | ✓                                                                                   | ✓                                                                                   | ✓                                                                                     |                                                                                       |
| NFF16-102                            | I3F2                                                                                | I2F2                                                                                | I2F1                                                                                  |                                                                                       |
| EN45545-2                            | HL2                                                                                 | HL3                                                                                 | HL3                                                                                   |                                                                                       |

### Pre Test Conditions

| Duration    | Standard         | Temperature | Relative Humidity |
|-------------|------------------|-------------|-------------------|
| 168 (Hours) | EN50086/IEC61386 | 23 (°C)     | 50 (%)            |