


## Rubber matting

### Zenith diamond mat

Finish: one side diamond design, other side fabric finish  
 Temperature range: -30° to +70°C

**Features:** strong and abrasion resistant • Equipped with non slip profile on the top

**Application:** very versatile applicable for indoor

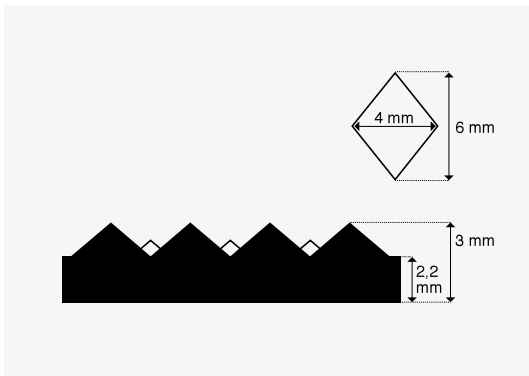

		Test method
Specific gravity grs/cm <sup>3</sup>	1,45	DIN 53508
Hardness shore A ± 5°	65	DIN 53505
Tensile strength Mpa	3,5	DIN 53504
Elongation at break %	250	DIN 53504
Abrasion mm <sup>3</sup>	300	DIN 53516
Compression set at 70°C for 22 hours %	35	DIN 53517

Thickness (mm)	No. of insertions	Width (mtr)	Length (mtr)	Colour	Quality	Article no.
3	0	1,20	10	black	SBR	DD65 3/0-1,2
3	0	1,20	10	grey	SBR	DD65G 3/0-1,2